



Amberled is led verlichting in natuurgetrouwe kleur (2000K) . Voor een betere leefomgeving voor mens en dier. Made in Haarlem, dus Europese kwaliteit. Straatlantaarns voor parkeerplaatsen, parken, rijbaan en binnenstad.

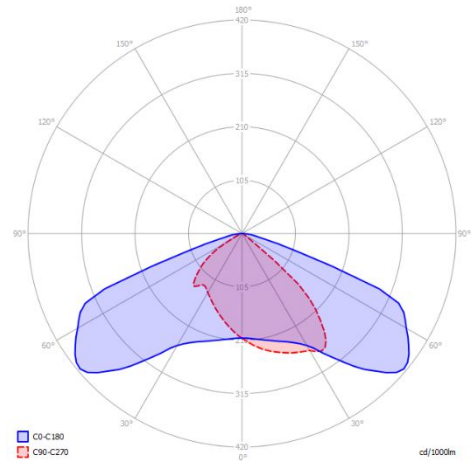

PowerSpectrum @ 1 meter Source Sensor Distance

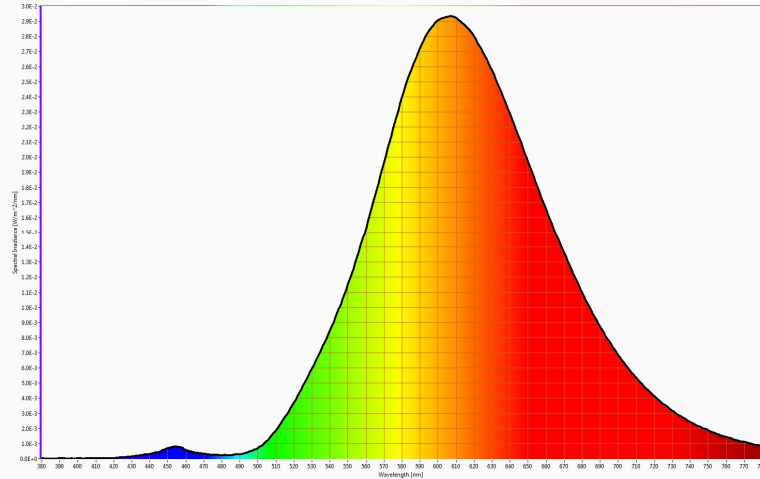

Models	Amberled				
	30 Watt	50 Watt			
Operating Voltage	120 - 250V AC 45/65Hz				
Energy Class	A++				
Input current	0.136	0.272			
Overall consumption	30W	50W			
Lighting class Application	ME-5	ME-3C			
Operating temperature	- 40°C to +60°C with built-in Thermal shut-off Protection				
Relative humidity	< 90 %				
DALI dimming	Built in.				
Auto Dimming	Standard Chronometric Step Integrated-Automated individual dimming overnight based on preset function*1				
0-10 V dimming	Optional Add-on. [DIM Suffix to order code]				
Wireless 868 MHz control	Optional Add-on. [W08 Suffix to order code]				
Wireless 2.4 GHz control	Optional Add-on. [W24 Suffix to order code]				
Intelli-lamp NEMA 7 Node Add-on	Optional Add-on [INT Suffix to order code]				
Color Rendering Index	Ra 63				
Flicker	< 5%				
Power Factor	> 0.97				
Light-source Lifespan	L70 > 70,000h				
Standard Compliance	EN 60598-1, EN 60598-2-3, EN 60529, EN 62262, EN 55015, EN 61000-3-2, EN 61000-3-3 EN 61547, EN 61000-4-2, EN 61000-4-4, EN 61000-4-5, EN 61000-4-8, EN 61000-4-11				
Color temperature CCT	Zeer warm wit (amber) 2000K				
Body	Powder coated high quality Aluminum body *2				
Optical lens cover	Borosilicate Tempered Glass (COB Series)				
Mounting	Standard Fixture ø60 mm pole brackets *3				
Protection Class	IP66 (IK10 Impact Resistant)				
Warranty	60 months according to standard Maxibel Light warranty conditions				